

# SPIROTRAP


Clean Quality,  
Pure Efficiency

## SPIROTECH

The New unique SpiroTrap®  
'Magnabooster' with a self  
cleaning magnet inside

Simple and efficient way to remove all types of debris and  
magnetite from central heating systems.

**NEW!**  
**SELF CLEANING**  
**MAGNET INSIDE**

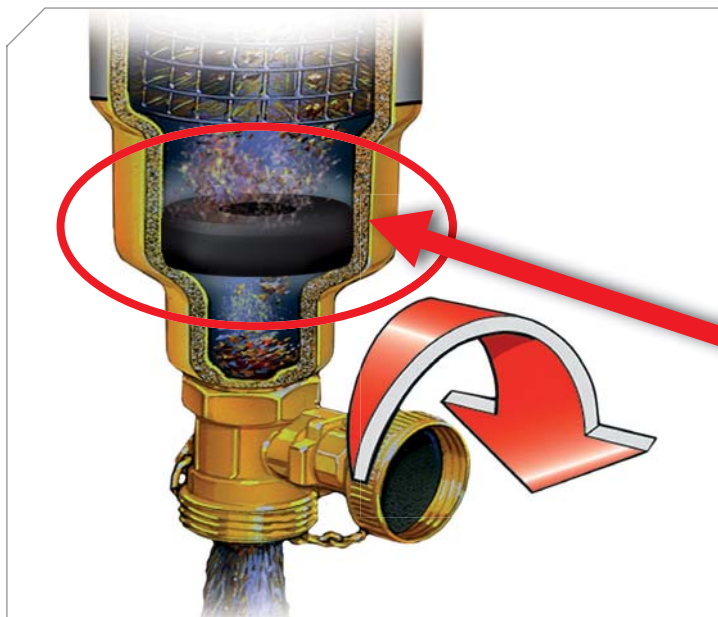

▷ Dirt Separator with self cleaning magnet inside



▷ Continuous Dirt Separation

### Dirt Separator and self cleaning magnet in one unit

All the advantages of the tried and tested SpiroTrap unit, now with the magnet added for accelerated and dynamic magnetite removal. Suitable for all new systems and boiler changes. The self cleaning magnet or unit does not have to be removed from the system in order to be cleaned, **NO MESS NO FUSS**. Available in horizontal and vertical models.

### System protection, optimal efficiency and energy savings

The 'Magnabooster' dramatically accelerates initial removal of magnetite. You clean the unit without having to isolate and remove the unit from the system. Simply open the drain valve for 3 – 5 seconds to clean. The pressure of the water flushes out the dirt and will clean the magnet automatically.

The SpiroTrap Magnabooster leaves your installation water totally magnetite free and **totally dirt free**. Your central heating system can now run at optimum efficiency. Suitable for all brands of boilers, every type of heating system and any fuel type.

### Benefits of the SpiroTrap 'Magnabooster':

- ▷ Simple installation
- ▷ No need to remove the magnet
- ▷ Maintenance free, flushing once a year
- ▷ Optimum efficiency and energy saving
- ▷ Robust brass construction
- ▷ Available in horizontal and vertical models
- ▷ Reducing costly call outs
- ▷ Standard 3 year guarantee


## Easy to install for a fast and efficient result

The SpiroTrap 'Magnabooster', is easy and quick to install, only 2 x 22mm compression fittings. Cleaning the unit is a simple task and only has to be done once a year\*. Follow the easy steps below to ensure an installation free of magnetite and all other dirt.


\* There is no detriment to the units being cleaned more than once a year.

### Specification Data SpiroTrap 'Magnabooster'

Specification Data		
d/female (G)	22 mm comp. Horizontal	22 mm comp. Vertical
Max. Flow Rate 1 m/s (l/sec)	0.35	0.35
Volume (l)	0.18	0.32
Weight (kg)	1.0	1.9

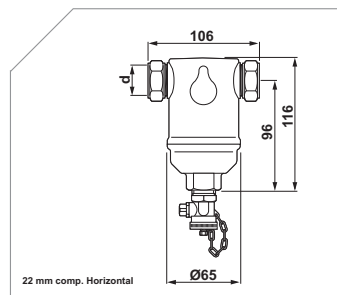

▶ Horizontal model

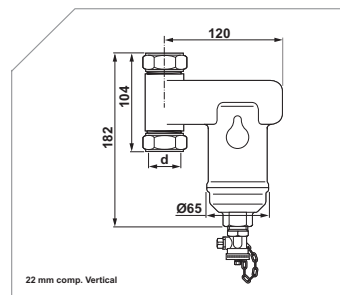

▶ Vertical model

### Spirotech

Spirotech leads the way in developing and manufacturing solutions to condition and control system fluids in the HVAC and Process Industries.


Our products and services increase system efficiency, accelerates commissioning process, decreases down time, saves energy and eliminates unnecessary maintenance.

More information about the 'Magnabooster':

[www.spirotech.co.uk](http://www.spirotech.co.uk)

Ph.: +44 (0)208 451 3344.


### Efficient results in 3 easy steps

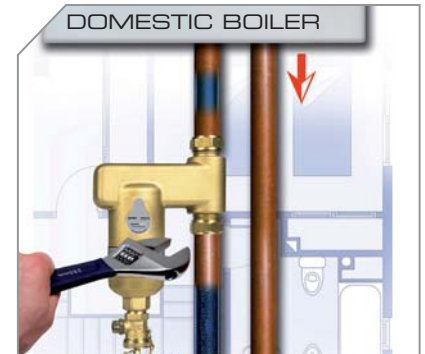

▶ 1: Install the SpiroTrap according to easy user manual



▶ 2: After one year \*\*: open the drain valve for 3-5 seconds until the water is clear

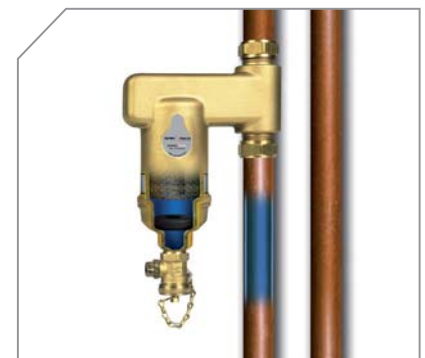

▶ 3: Continuous Dirt Separation

\*\* We recommend that you clean your SpiroTrap one month after installation and then yearly afterwards.



#### Spirotech UK Ltd.

P.O. Box 109 Glossop  
Derbyshire SK13 1WT

Ph.: +44 (0)208 451 3344  
Fax: +44 (0)208 451 3366

E-mail: [info@spirotech.co.uk](mailto:info@spirotech.co.uk)  
[www.spirotech.co.uk](http://www.spirotech.co.uk)