


SPIROTECH SPECIFICATION SHEET MultiControlKompact 300 duo-4.0-Twin		SPIROTECH 
Customer:	Project:	Type: EMCK-D300-4.0-TWIN
Reference:		

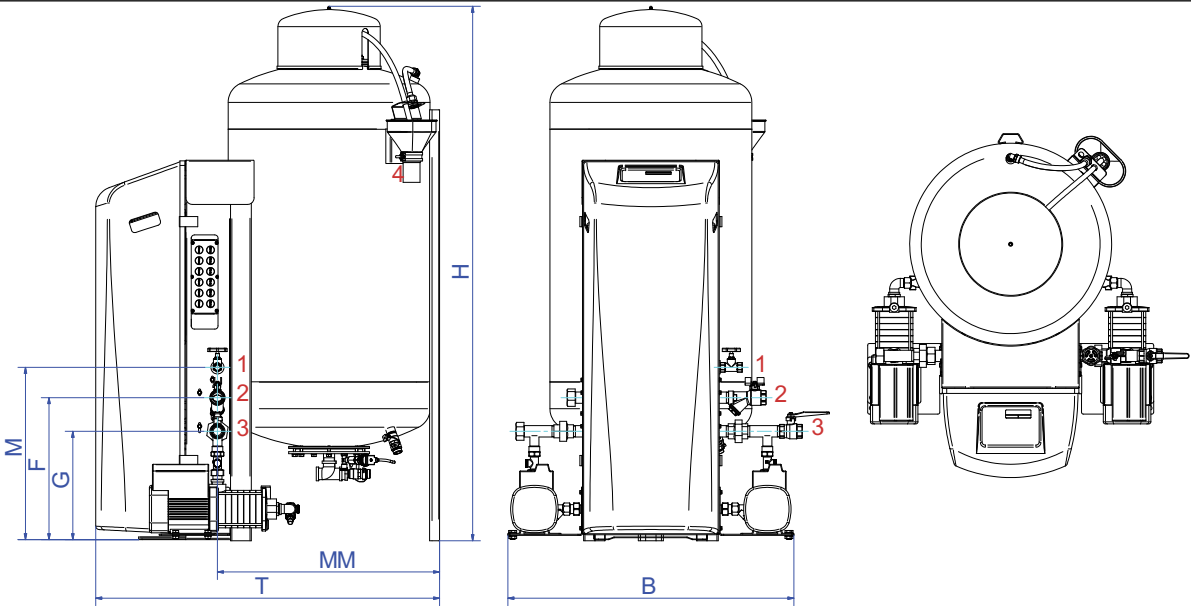

Design criteria		Dimensions	
Medium:	Water / glycol (max 40%)	Height:	1588 mm
Min. Pressure:	1.0 bar-g	Width:	850 mm
Discharge:	4.0 bar-g	Depth:	1022 mm
Max. pressure:	10.0 bar-g	B	850 mm
Max. temperature:	70 °C	F	422 mm
Ambient temperature:	0 - 40 °C	G	322 mm
Refill fluid:	0 - 70 °C	H	1588 mm
		M	512 mm
		MM	660 mm
		T	1022 mm
Testing and quality assurance		Dry weight (approx):	151 kg
Running test:	yes	Connections	
Test medium:	Water	1. Refill	Rp1/2
High voltage test:	yes	2. Exp. overflow pipe	Rp1
Test certificate:	no	3. Exp. pressure pipe	Rp1
CE-marking:	yes	4. Discharge	DN50 Geberit
Material certificates:	no		
Construction materials			
Fittings / pipes:	Copper/Brass		
Pump:	AISI316		
Main pump:	Horizontal multistage		
	2 x 50%		
Overflow valve(s)	2 x 100%		
Casing:	Galvanised steel plate		
Color:	Yellow (RAL 1003)		
Power supply			
Voltage:	[1x] 230V~/50Hz		
Power consumption:	1.1 kW		
Protection level:	IPX4D		

Subject to changes