


SPIROTECH SPECIFICATION SHEET MultiControlKompact 75 duo-4.0-Twin		SPIROTECH 
Customer:		Type: EMCK-D75-4.0-TWIN
Project:		
Reference:		

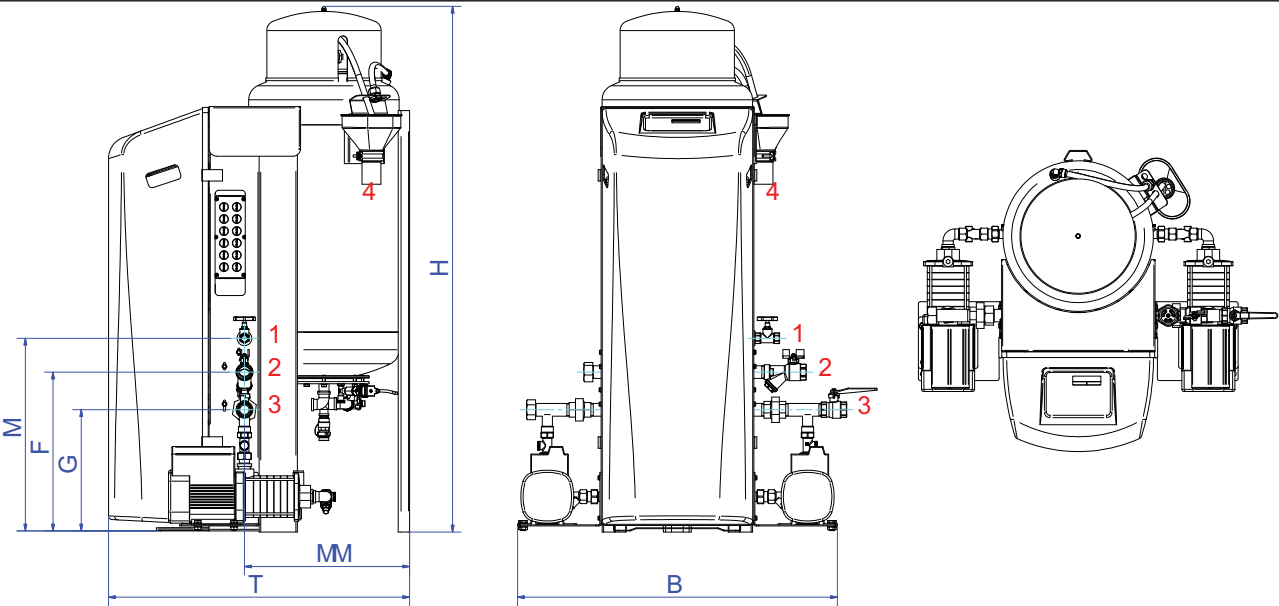

Design criteria Medium: Water / glycol (max 40%) Min. Pressure: 1.1 bar-g Discharge: 4.0 bar-g Max. pressure: 10.0 bar-g Max. temperature: 70 °C Ambient temperature: 0 - 40 °C Refill fluid: 0 - 70 °C		Dimensions Height: 1397 mm Width: 850 mm Depth: 800 mm B 850 mm F 422 mm G 322 mm H 1397 mm M 512 mm MM 439 mm T 800 mm Dry weight (approx): 113 kg	
Testing and quality assurance Running test: yes Test medium: Water High voltage test: yes Test certificate: no CE-marking: yes Material certificates: no		Connections 1. Refill Rp1/2 2. Exp. overflow pipe Rp1 3. Exp. pressure pipe Rp1 4. Discharge DN50 Geberit	
Construction materials Fittings / pipes: Copper/Brass Pump: AISI316 Main pump: Horizontal multistage 2 x 50% Overflow valve(s) 2 x 100% Casing: Galvanised steel plate Color: Yellow (RAL 1003)			
Power supply Voltage: [1x] 230V~/50Hz Power consumption: 1.1 kW Protection level: IPX4D			

Subject to changes