

# SPIROTECH SPECIFICATION SHEET




## EG 3000 M - 3000 litre

Customer:

Project:

Reference:

Type: **EP3000R**

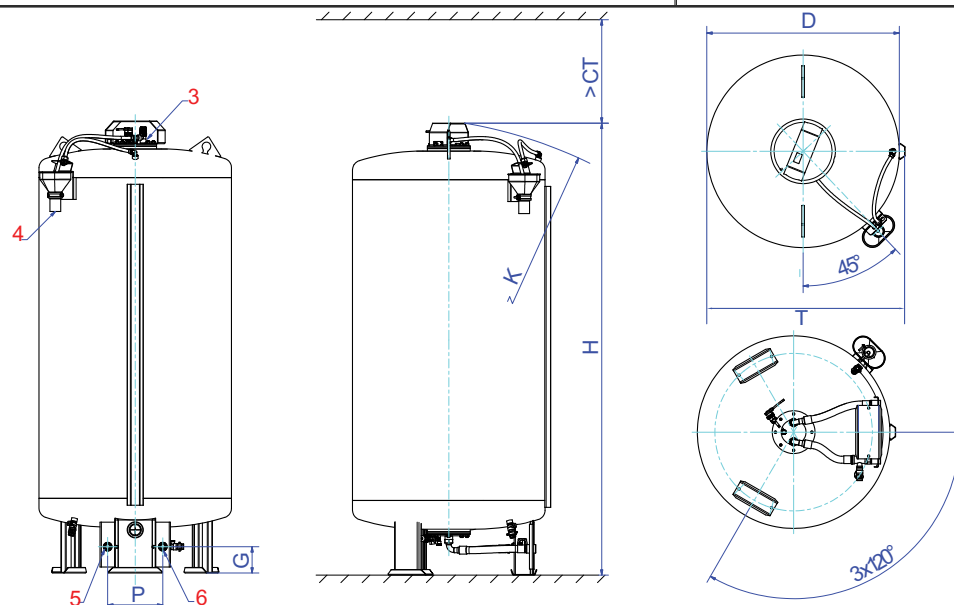

### Design criteria

|                   |                          |
|-------------------|--------------------------|
| Medium:           | Water / glycol (max 40%) |
| Max. pressure:    | 0.5 bar-g                |
| Max. temperature: | 70 °C                    |
| Design standard:  | Factory standard         |

### Testing and quality assurance

|                                         |     |
|-----------------------------------------|-----|
| Leakage test:                           | yes |
| Test certificate:                       | no  |
| Design and manufacturing acc. 97/23/EC: | yes |
| Material certificates:                  | no  |
| Drawing:                                | no  |

### Construction materials

|          |                   |
|----------|-------------------|
| Body:    | cold rolled steel |
| Bladder: | Butyl             |
|          | Replacable        |
| Paint:   | Standard          |
| Color:   | Yellow (RAL 1003) |

### Dimensions

|                   |         |
|-------------------|---------|
| Height:           | 3275 mm |
| Width:            | 1200 mm |
| Depth:            | 1230 mm |
| CT                | 500 mm  |
| D                 | 1200 mm |
| G                 | 90 mm   |
| H                 | 3275 mm |
| K (tip dimension) | 3340 mm |
| P                 | 310 mm  |
| T                 | 1230 mm |
| Weight            | 580 kg  |

### Connections

|                  |        |
|------------------|--------|
| 3. Gas side      | Rp 3/4 |
| 4. Safety Drain  | DN50   |
| 5. suction pipe  | Rp5/4  |
| 6. overflow pipe | Rp5/4  |

Subject to changes