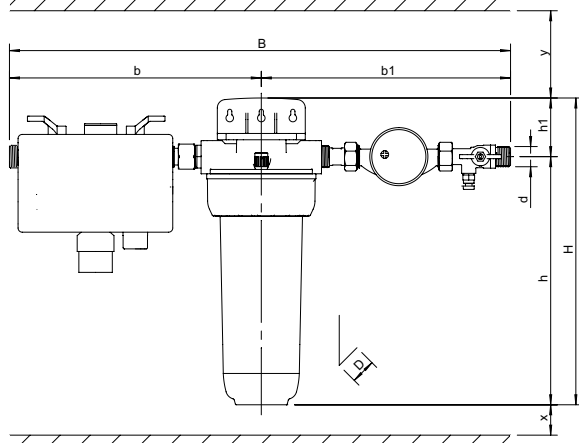


SPIROTECH SPECIFICATION SHEET		SPIROTECH 	
SpiroPure Home Basic+			
Customer:		Type:	G76.350
Project:			
Reference:			
Design criteria Medium: Water Processing Capacity 120 l/h Max. Filling Capacity 112.5 l @420µS/cm to <100µS Min. Pressure: 1.5 bar-g Max. pressure: 8.0 bar-g Min. Temperature: 5 °C Max. temperature: 40 °C		Drawing  Dimensions Height: 367 mm Width: 599 mm Depth: 139 mm B 599 mm b 301 mm b1 298 mm d G3/4" D 139 mm H 367 mm h 297 mm h1 70 mm x 25 mm y 200 mm Weight: 3.7 kg Resin Volume: 0.75 l	
Connections Inlet / outlet G3/4"			
Testing and quality assurance Test certificate: no Material certificates: no Compliance: VDI 2035, ÖNORM H 5195-1 SWKI BT 102-2			
Construction materials Bracket: PP Head: PP Connections Brass Cartridge: Polystyrol Resin: synthetic polymer			
Subject to changes			