

Product data sheet Spirotech

Product name

SpiroTop -1/2" -HighT+P

Product properties

A brass air vent for high-temperature and high-pressure systems (max. 150 °C, max. 25 bar) with a 1/2" connection

- For high temperature and high-pressure system environments
- Special valve construction ensures valve is closed completely
- Long lasting valve seat
- Solid plastic (TPX), robust floats which cannot rupture
- Large air gap between the valve and the water (at least 40 mm) prevents valve contamination and leaks
- Applicable with 50/50 Ethylene Glycol / Water (Volume)
- 1/2" connection prevents pipette effect


Article number

AB050/025

Product image



Product dimensions

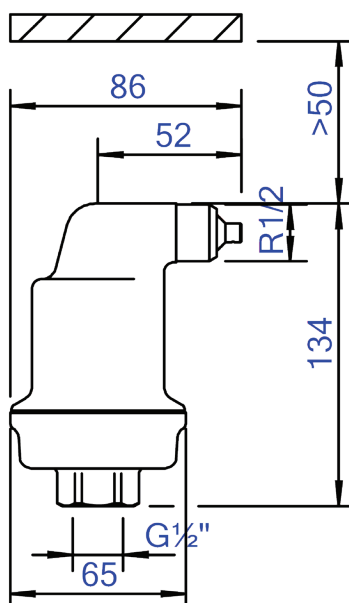

Product data sheet Spirotech

ETIM product data

Height	134 mm
Housing material	Brass
With leakage protection	No
With air intake barrier	No
Angle connection	No
Nominal diameter	1/2 inch (15)

Material float	Fluorelastomer rubber (FPM/FKM)
Max. medium temperature (continuous)	150 °C
Surface protection	Untreated
Lockable	No
Connection 1	Internal thread cylindrical BSPP-G (ISO 228-1)
Max. operating pressure at 20 °C	25 bar

Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website.

