

Product data sheet Spirotech

Product name

SpiroTop -1/2" -St.Steel -HighT -TPX

Article number

AB050/R002

Product properties


Product image

Stainless steel air vent for high-temperature systems (max. 180 °C) with a 1/2" connection

- Used in high temperature system environments
- Special valve construction ensures valve is closed completely
- Long lasting valve seat
- Solid plastic (TPX) or AISI 316, robust floats which cannot rupture
- Applicable with 50/50 Ethylene Glycol / Water (Volume)
- Large air gap between the valve and the water (at least 40 mm) prevents valve contamination and leaks
- 1/2" connection prevents pipette effect



Product dimensions

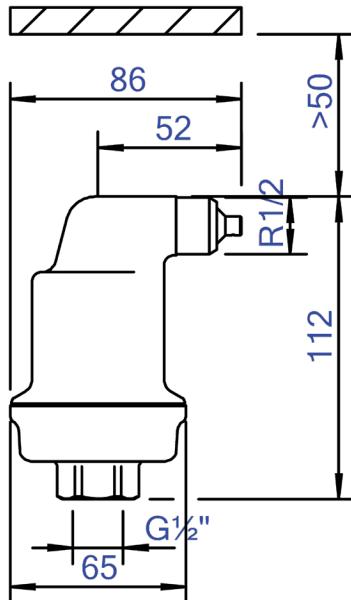

Product data sheet Spirotech

ETIM product data

Height	112 mm	Max. medium temperature (continuous)	180 °C
Housing material	Stainless steel	Surface protection	Untreated
With leakage protection	No	Lockable	No
With air intake barrier	No	Connection 1	Internal thread cylindrical BSPP-G (ISO 228-1)
Angle connection	No	Max. operating pressure at 20 °C	10 bar
Nominal diameter	1/2 inch (15)	Material quality float	Polymethylpentene (PMP)

Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website.

