

# Product data sheet Spirotech

## Product name

**SpiroTop Solar -1/2"**

## Product properties

A brass automatic air vent for solar systems with a 1/2" connection

- Specially developed for Solar (high temperature) installations
- Applicable with max. 20% - 50% Ethylene Glycol and water (Volume)
- Removes circulating and trapped air
- Greatly reduces commissioning times
- Minimal constant pressure drop
- No unnecessary shutdown
- Long lasting valve seat
- Connection diameters 1/2"


## Article number

**AB050/008**

## Product image



## Product dimensions

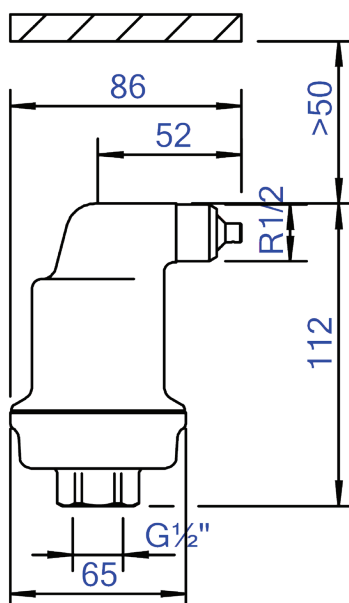

# Product data sheet Spirotech

## ETIM product data

Height	112 mm
Housing material	Brass
With leakage protection	No
With air intake barrier	No
Angle connection	No
Nominal diameter	1/2 inch (15)
Material float	Fluorelastomer rubber (FPM/FKM)

Max. medium temperature (continuous)	180 °C
Surface protection	Untreated
Lockable	No
Connection 1	Internal thread cylindrical BSPP-G (ISO 228-1)
Max. operating pressure at 20 °C	10 bar
Material valve	Fluorelastomer rubber (FPM/FKM)

### Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website.

